




Manually Changing Satellite Correction Settings

NH-372 Receivers with Intelliview Display


1. Press the **Back button** in the bottom right corner to return to the Home Screen.

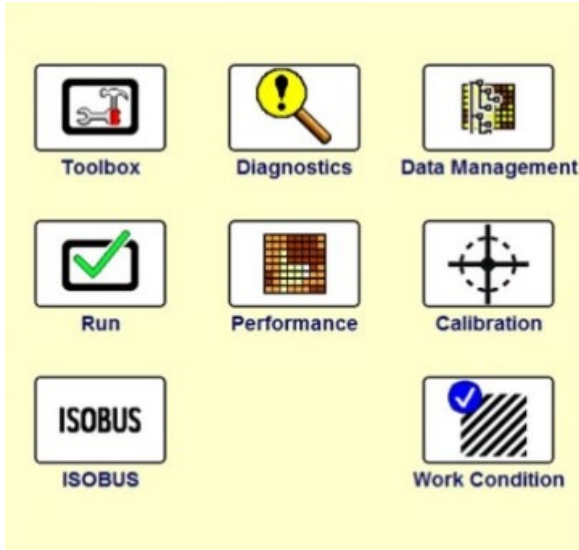


2. Go to **Diagnostics**.




3. Go across the bottom/side tabs to find **RDI**.

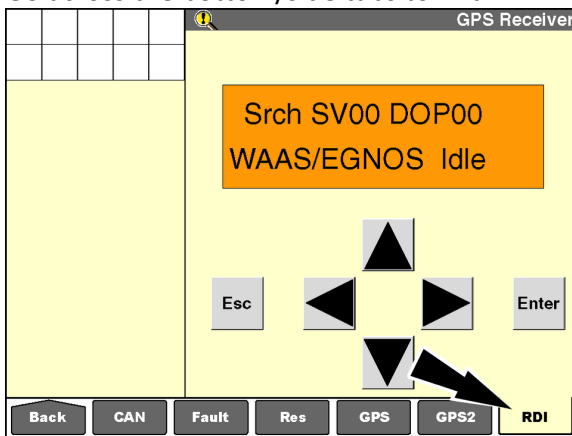



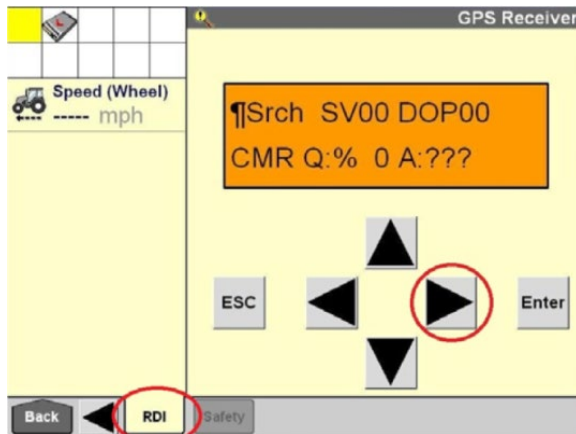

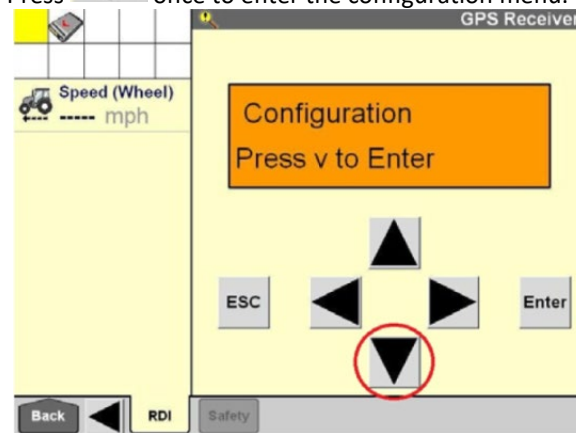


4. On the RDI window, press  twice to access the 'Configuration' menu











5. Press  once to enter the configuration menu.



6. Press  until **DGPS Config** displays.
7. Press  until the **SBAS Sats** menu displays.
8. Press  to get the satellite name/ PRN in edit mode (the cursor will blink on last the digit of the
9. SBAS satellite number when in edit mode)
10. Press  or  to get to the **SBAS PRN 138**
11. Press  to make the satellite mode editable (the cursor should blink on **Heed health** or **Auto Heed** depending on the system setup):
12. Press  until **Disabled** displays:



CHESLEY | LUCKNOW | MOUNT FOREST | WALTON

13. Press  to get the cursor blinking on the satellite name again.
14. Press  until **PRN 135** displays.
15. Press  to make the satellite mode editable (cursor blinks on **Disabled**)
16. Press  until **Heed Health** displays.
17. Press  to confirm your changes and to leave the edit mode.
18. Press  or  to review other SBAS settings to ensure all others except PRN 135 are set to Disabled
19. Press  several times to return to the RDI home screen.